

Fixed Attenuator

Part No.: WLA-5152-75XX



75Ω 5-3000MHz F Type XXdB Fixed Attenuator

Features


- Suitable for 75Ω Communication Systems



Specification		
Impedance :	75Ω	
Frequency :	5-3000 MHz	
Standard Value :	1,2,3,5,10,15,20,25,30dB	
VSWR :	1.3 (max.)	
Insertion Loss :	5-2500 MHz	6.0 (typ.) / 7.0 (max.)
	2501-3000 MHz	6.5 (typ.) / 7.5 (max.)
Power	100mW	
DC Withstand	DC 100V (max.)	
Connector Type :	F Male to F Female	

Outline Drawing

Units: mm

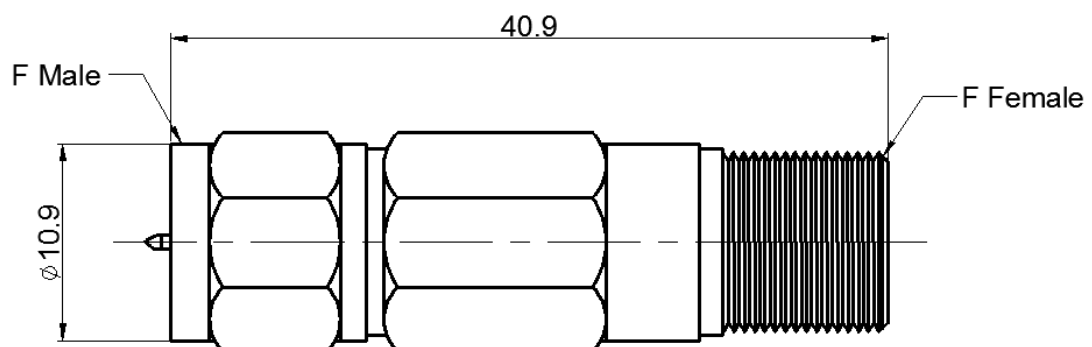

Dimension Tolerance: ± 0.3 mm