

DC BLOCK

Part No.: **WLDB-1112**

50Ω 8GHz SMA M/F Inner DC BLOCK



Features


- Broadband Performance
- Low Loss



Specification	
Frequency :	DC-8GHz
Impedance :	50Ω
Insertion Loss :	0.5dB (MAX.)
VSWR :	1.25: 1 (MAX.)
Power Handling :	2W
Blocking Voltage :	50V
Operating Temperature :	-20~115°C
Connector Type :	SMA Male to SMA Female

Outline Drawing

Units: mm

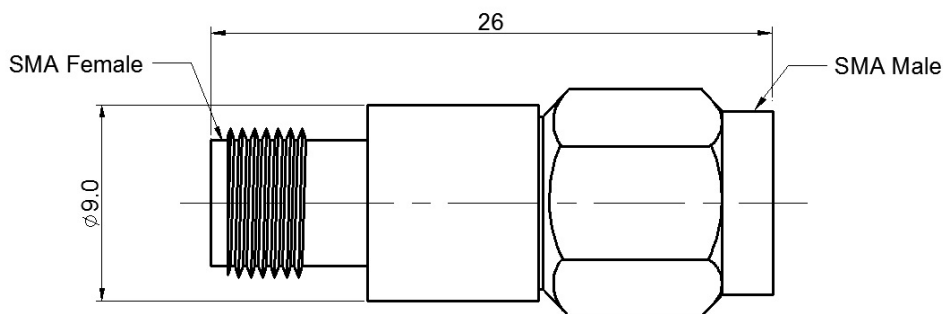

Dimension Tolerance: ±0.5 mm